




stride®80 Proximity, Barcode, swipe or PIN Time Clock

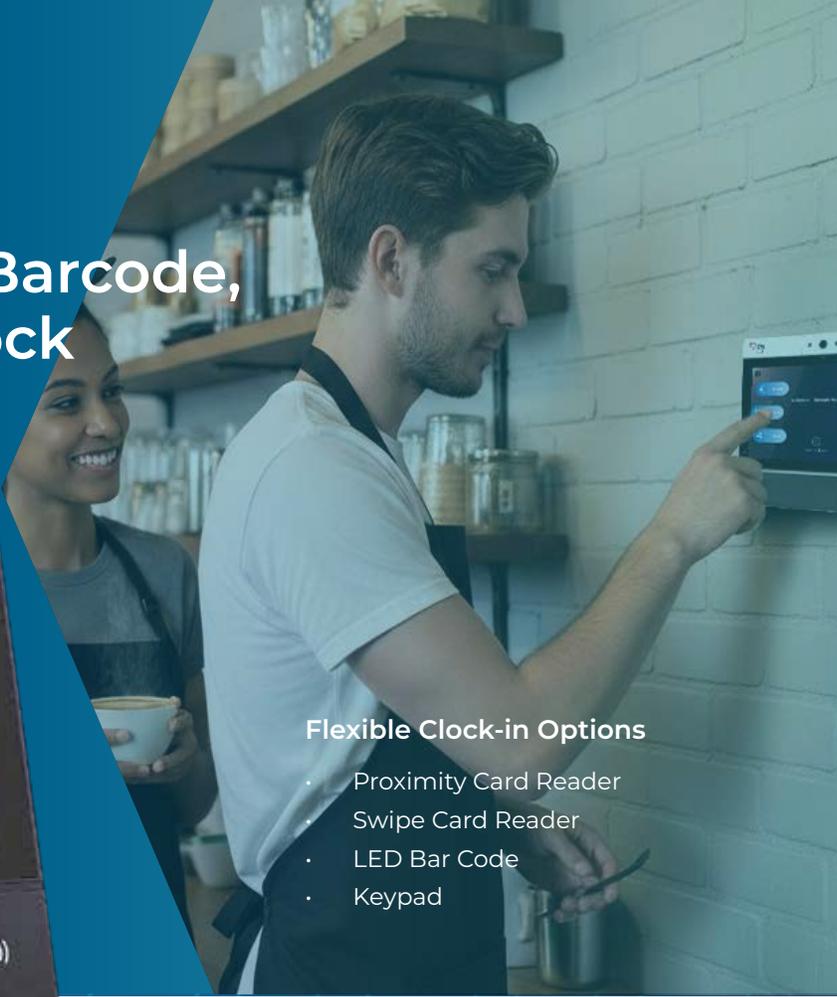

Flexible Clock-in Options

- Proximity Card Reader
- Swipe Card Reader
- LED Bar Code
- Keypad

Secure. Fast. Privacy-Compliant.

Enterprise-grade clock-ins using existing proximity cards, ID badges, or PIN codes. Optimized for Workday, Oracle HCM, BambooHR, Legion, and Connecteam.

Key Benefits: Fraud-proof authentication, instant verification, BIPA-compliant, seamless HCM sync, rugged IP65 build, self-service functions.

Flexible Options: RFID proximity reads (<1 sec), secure PIN keypad, barcode backup—all on same Android hardware.

Proven Results: 95% fewer disputes. High-traffic manufacturing, health-care, retail ready.

stride80 features include:

- 8" Easy-to-Use Touch Display
- Flexible Clock-in Options
- Quick Employee Verification
- Durable, Robust Design
- Ideal for High-Volume, Fast-Paced Industrial Settings.

Flexible Clock-in Options



Proximity Card Reader



LED Barcode Scanner



Swipe Card



stride®80 Time Clock Specifications

User Interface

8" Capacitive multi-touch color screen
Software controllable multicolor LED indicator bar
Microphone and 1 speaker
Presence sensor

Optional Keypad

- 20 keys 0-9 , F1-F6, Clear and Enter keys

Memory

2GB

Mass Storage

16GB of which 10GB are user available

Processor

Quad Core A7, 1.1GHz

Communications

10/100 Base T. Ethernet with DHCP, Static IP address
WIFI - 2.4Gbit/s, 802.11 b/g/n

Optional GSM

- 4G GSM Modem

Dimensions

Base Model:

- 8.98" wide x 7.69" high x 3.13" deep
- 228.2mm wide x 195.3mm high x 79.6mm deep

XL Model:

- 12.17" wide x 7.69" high x 3.13" deep
- 309.0mm wide x 195.3mm high x 79.6mm deep

Mag swipe add on

- 1.16" x 3.74" x 1.34"
- 29.47mm x 96mm x 34.04mm

Power

12V DC 30W output
Terminal power consumption less than 30 Watts

Optional PoE

- PoE IEEE 802.3at (30W, PoE+)

Optional Battery

- Li-ion | 8.4v @ 2600 mAh up to 1 hour of operation.

Environment

Operating Temperature:

- Without battery backup - 0° to 50° C (32° to 122° F)
- With battery backup - 0° to 34° C (32° to 93.2° F)

Supported readers and card technologies

Optional Barcode reader

- Visible red light

Optional Proximity readers

- Low Frequency (125KHz) HID Prox, Marin
- High Frequency (13.56MHz) HID iClass SE, MiFare

Optional Mag swipe reader

- Track 2

ACCU-TIME SYSTEMS INC.

THE AMERICAS

Corporate Headquarters
20-B International Drive
Windsor, CT 06095

TEL: (860) 870-5000

FAX: (860) 872-1511

Toll Free: (800) 355-4648

sales@accu-time.com

www.accu-time.com

EMEA & APAC

United Kingdom

TEL: +44 (0) 1202 606068

All Other Locations

TEL: +44 (0) 2920 885599