


stride[®]80 with Facial Recognition

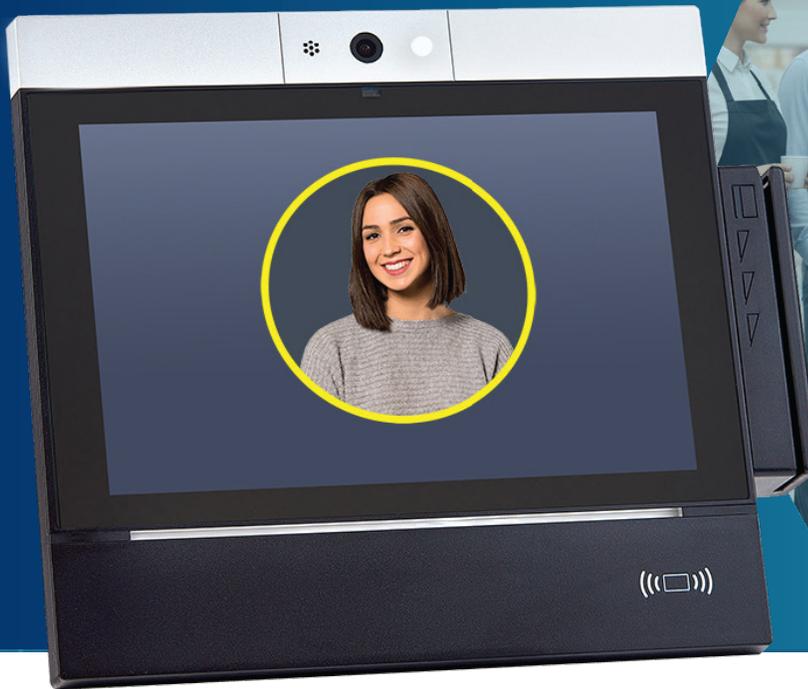

- Facial Recognition
- Proximity Card Reader
- Swipe Card Reader
- LED Bar Code

STRIDE80: PRECISION TIME TRACKING SIMPLIFIED

The stride80 time clock is engineered for reliability and versatility, meeting the needs of organizations across industries—from retail and healthcare to manufacturing, logistics, business services, and the public sector. It delivers near real-time, secure workforce data to streamline payroll, simplify compliance, and optimize labor costs. Employers can select the authentication method that best fits their security and operational needs, such as biometric, badge, barcode, or swipe card entry.

The stride80 helps ensure accurate payroll, prevent time fraud, and support compliance with audit-ready data. This all-in-one solution empowers businesses in any sector to boost operational agility, improve employee experience, and confidently manage complex labor requirements at scale.

stride[®]80 features include:

- 8" Easy-to-Use Touch Display
- Flexible Clock-in Options
- Quick, Contactless Verification
- Reliable Connection

stride80: Flexible Clock-in Options



Proximity Card Reader



LED Barcode Scanner



Swipe Card

stride®80 with Facial Recognition Terminal Specifications

User Interface	8" multi-touch color screen Software controllable multi-color LED indicator bar Microphone and speaker Presence sensor LED indicator for camera usage 8 Mega Pixel Camera - Supports photo and video
Memory	2GB
Mass Storage	16GB of which 10GB are user available
Processor	Quad Core A7, 1.1GHz
Communications	10/100 Base T. Ethernet with DHCP, Static IP address WIFI - 2.4Gbit/s, 802.11 b/g/n Optional GSM <ul style="list-style-type: none">· 4G GSM Modem
Dimensions	Base Model: <ul style="list-style-type: none">· 8.98" wide x 7.69" high x 3.13" deep· 228.2mm wide x 195.3mm high x 79.6mm deep Mag swipe add on <ul style="list-style-type: none">· 1.16" x 3.74" x 1.34"· 29.47mm x 96mm x 34.04mm
Power	12V DC 30W output Terminal power consumption less than 30 Watts Optional PoE <ul style="list-style-type: none">· PoE IEEE 802.3at (30W, PoE+) Optional Battery <ul style="list-style-type: none">· Li-ion 8.4v @ 2600 mAh up to 1 hour of operation.
Environment	Operating Temperature: <ul style="list-style-type: none">· Without battery backup - 0° to 50° C (32° to 122° F)· With battery backup - 0° to 34° C (32° to 93.2° F)
Supported readers and card technologies	Optional Barcode reader <ul style="list-style-type: none">· Visible red light Optional Proximity readers <ul style="list-style-type: none">· Low Frequency (125KHz) HID Prox, Marin· High Frequency (13.56MHz) HID iClass SE, MiFare Optional Mag swipe reader <ul style="list-style-type: none">· Track 2

ACCU-TIME SYSTEMS INC. THE AMERICAS
Corporate Headquarters
20-B International Drive
Windsor, CT 06095
TEL: (860) 870-5000 FAX:
(860) 872-1511 Toll Free:
(800) 355-4648 sales@
accu-time.com www.
accu-time.com

EMEA & APAC
United Kingdom
TEL: +44 (0) 1202 606068

All Other Locations
TEL: +44 (0) 2920 885599

Empower Your Workforce Time Tracking with Purpose-Built Precision